

Evaluation Kit for the NCV77320 Inductive Position Sensor Interface Chip

EVBUM2863/D

INTRODUCTION

This document describes the NCV77320 Inductive Position Sensor Interface Evaluation kit and its properties. The Evaluation kit is intended for demonstration of the

measurement capabilities of the NCV77320. The kit can be used for first evaluations and is not intended for use at low and high automotive specified temperatures.

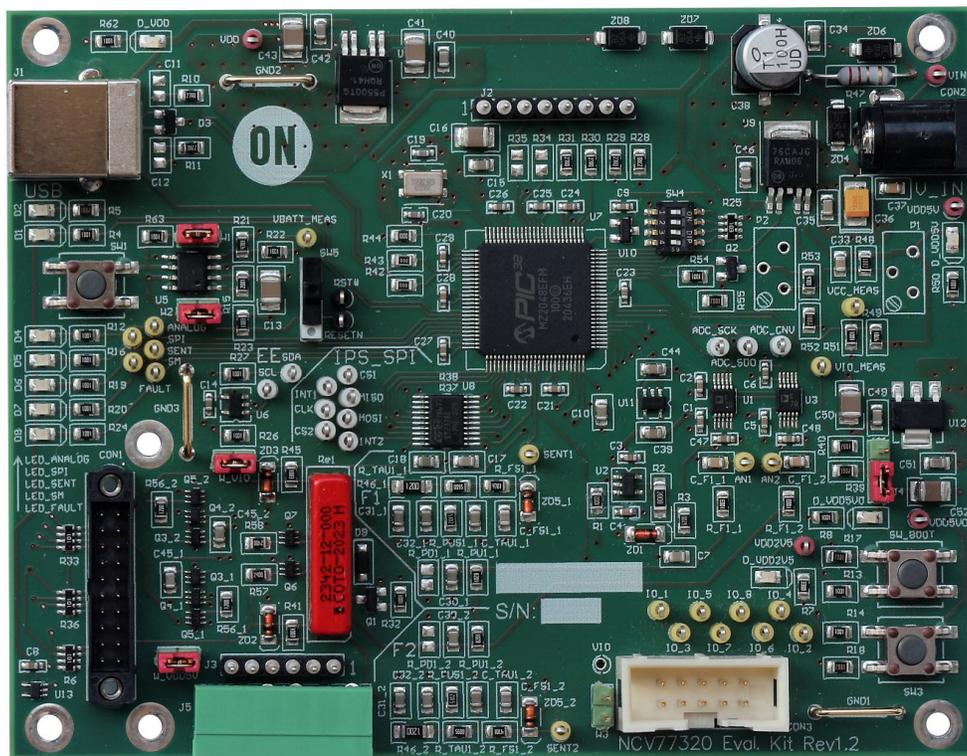


Figure 1. Evaluation Board Photo

Features

- PC GUI Operation via USB
- Based on the NCV77320 Inductive Position Sensor
- Two NCV77320 Chips on Piggyback Connected to Evaluation Kit
- Switchable ANALOG and SENT Output through Relay
- Bootloader Application for Updating Firmware

Typical Applications

- Demonstration of the NCV77320 Performance
- Evaluation Platform Assisting Software
- Programming NCV77320 in Service Mode

Revision History

- **GUI**
 - 1.1 first silicon version (obsolete)
 - 1.2 second silicon version (active)
- **FW**
 - 1.1 first silicon version (obsolete)
 - 1.2 second silicon version (active)

General Description

The Evaluation kit is intended for use with the NCV77320 Inductive Position Sensor chip.

A Small piggyback board with rotor and two NCV77320 chips is connected to the Evaluation kit. Both chips can be programmed and controlled from the PC GUI via USB

In Operating mode it is possible to set the chip to ANALOG or SENT output. If the output is set to ANALOG, the output voltages of the chips are measured by an on-board ADC and send to the GUI, if the output is set to SENT, it is possible to read the position from the output pins through this protocol. Complementary to ANALOG or SENT operation, it is possible to use the SPI interface to access the chip(s) internal registers as well.

In Service mode it is possible to communicate with the chips via the serial interface through the output pin or by SPI. In this mode it is possible to calibrate the chip and program the registers into the EEPROM.

The Evaluation kit is operated through a windows-based GUI (Graphical User Interface) and is connected via a USB cable to the microcontroller of the evaluation board. The microcontroller handles the translation from USB to the NCV77320 devices.

For the description and capabilities of the NCV77320, refer to the datasheet of this devices.

PC Software Requirements

The GUI works with Microsoft Windows 7, 8, 10 and 11 platforms.

The GUI software is a part of the install package, which can be downloaded from the EVK product page: <https://www.onsemi.com/design/evaluation-board/NCV77320R1GEVK> . It can be installed by executing the file: Install_NCV77320_EVK_GUI.exe.

Powering up the Evaluation kit:

1. Install the GUI software at the appropriate Windows platform with a free USB channel. Follow the instruction on the screen for installation. After successful installation, the Evaluation kit can be powered up.
2. Connect the USB cable from the Evaluation kit to the PC.
3. Connect +12 Vdc supply to the V_IN connector.
4. Wait until the drivers for the Evaluation kit are found (if not, install the USB CDC driver manually).
5. Launch the NCV77320_EVK GUI.



The Evaluation kit should connect automatically.

USB Connection

If the connection is established, the USB connect button is green and it is possible to see the COM port which is connected.




If the Evaluation board is not connected or the GUI just didn't find it, USB Disconnect button is orange.



If the GUI is launched before connecting the Evaluation kit or the power supply is turned on later, clicking to USB Connect button should connect the evaluation kit to the COM port. Clicking to USB Disconnect should disconnect the Evaluation kit.

If Connect automatically is checked in the Menu bar → USB connection, the GUI will try to connect to the COM port automatically. It is possible to connect to the COM port manually by clicking Menu Bar → USB connection → Manage manually.

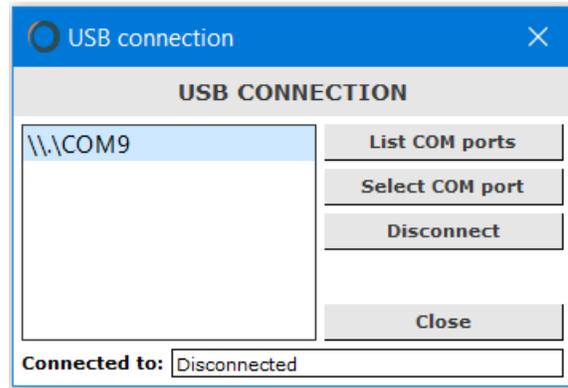

Click on the COM port in the list to choose the correct one and then click on the Select COM port button. The bottom should change the text to **Connected to:** COM port.

If Manage manually is clicked, in Menu Bar → USB connection → Connect automatically is unchecked. It is possible to click on it and “check” it, so the GUI will try to connect automatically again.

Main Screen

The picture below shows the main Operation mode screen of the GUI. On the top there is a Menu bar, where several tabs can be selected (Green marked area):

- [Operation mode](#): Read and show the output data, evaluation kit information
- [Service mode](#): Enter/Exit Service mode, easy device configuration
- [REGs \[address\]](#): Detailed EEPROM memory content
- [Runtime memory](#): Contains the real time information: the actual position, ADC data and diagnostics
- [Fail Flags](#): Decoded diagnostic information

Menu Bar

• USB connection

Gives options for automatic and manual USB connection.

• File


Save registers or data graph to .csv. It is also possible to save the content of the memory to .cnf file or load a previously saved configuration.

• Options

The Customer can turn on or off the tool tips in the GUI.

• Window


- ♦ [WatchDog](#) – setting up the periodic watchdog kick when watchdog is enabled
- ♦ [SENT messages](#) – read fast and slow SENT messages
- ♦ [Calibration](#) – automatic dcc calibration without the rotor
- ♦ [Direct ADC sampling](#) – periodic sampling of the rec32 and rec21 registers for the 2 coil sine/cosine sensors
- ♦ [PIC32 bootloader](#) – launches the program tool for flashing new firmware to the micro controller
- ♦ [Help](#) – show help window

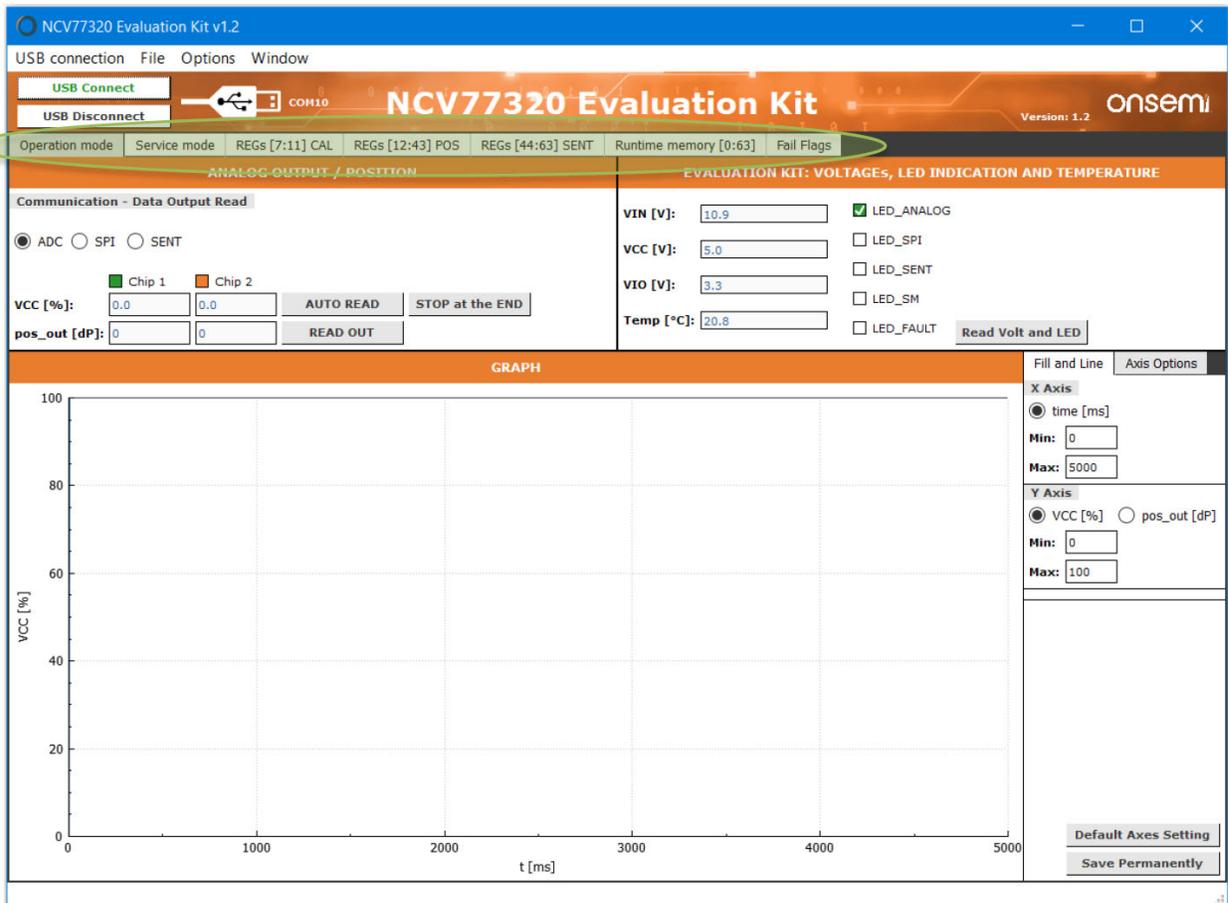


Operation Mode Tab:

In Operation mode tab there are three main parts:

- “ANALOG OUTPUT / POSITION”
- “EVALUATION KIT: VOLTAGES, LED INDICATION AND TEMPERATURE”
- “GRAPH”

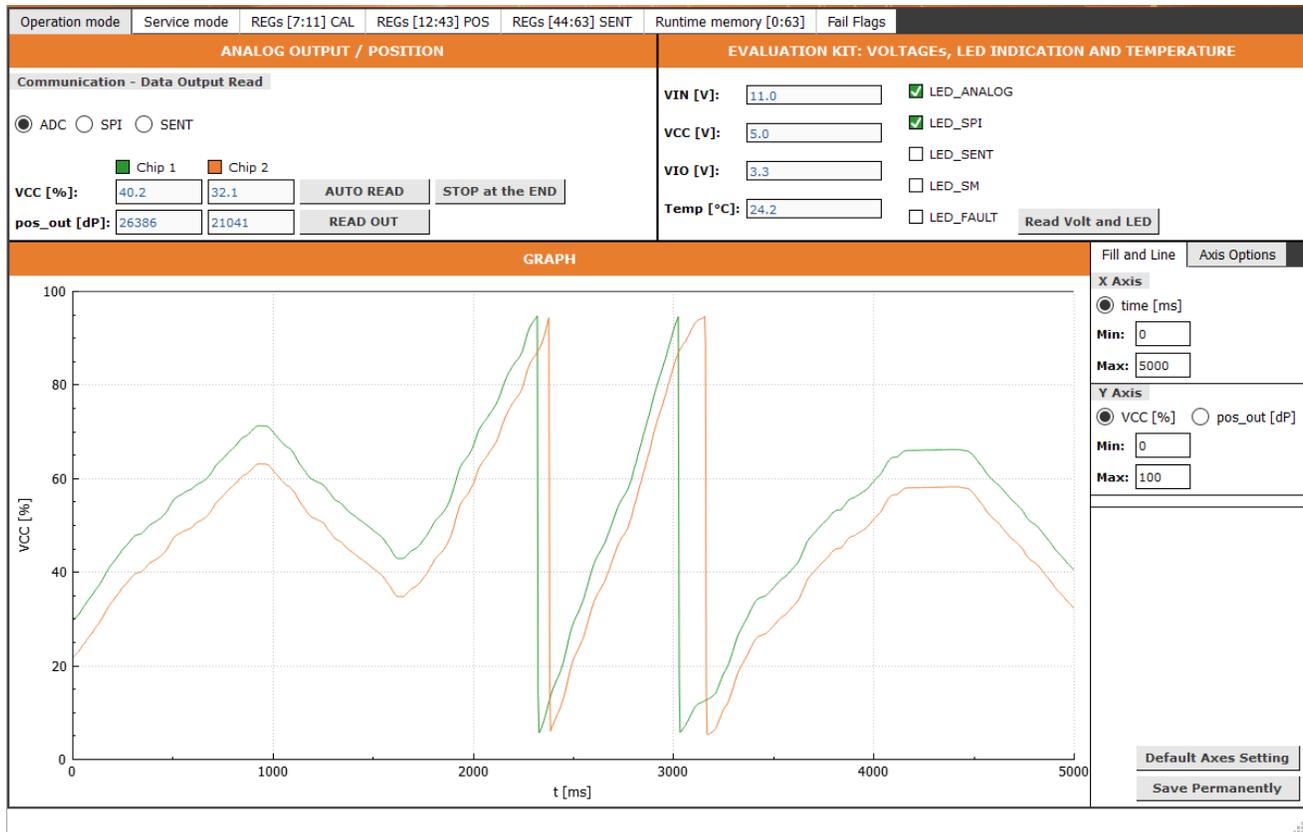

ANALOG OUTPUT / POSITION

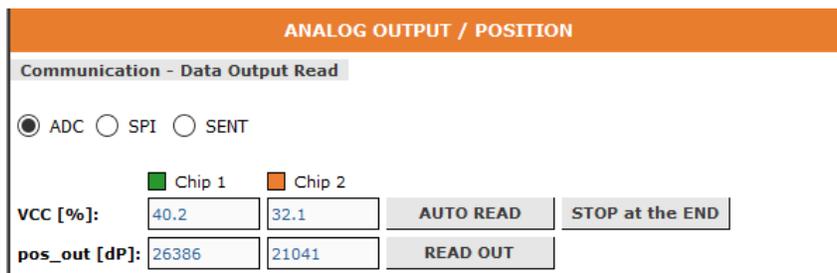

In “ANALOG OUTPUT / POSITION” it is possible to read the position data from two chips. First it is necessary to choose the communication interface for reading the data:

- **ADC** – Data readout through the ADCs which are on the Evaluation Kit. Each chip has its dedicated ADC
- **SPI** – Data readout through the SPI interface. It is necessary to enable this option in EEPROM – ADDRESS [8], spi_ena [2]
- **SENT** – Data readout through the SENT interface

ANALOG or SENT output option has to be programmed in EEPROM – ADDRESS [8], sent_drv [12]. Each chip can be set differently. If a chip is programmed for ANALOG output but the communication is set to SENT in the GUI, it is not possible to read proper data, and vice versa.

EVBUM2863/D

The position data is displayed in four Line Edits – two for both chips. Pos_out is the 16 bit digital position data and the VCC is the recalculated value to the percentage of the VCC because of the ratiometric output.

There are three push buttons:

- **READ OUT**– Read the data from both chips and display them to line edits
- **AUTO READ** – Continuous position data readout and plotting them in the graph
- **STOP at the END** – Stops auto read when the data reach the end of the graph

The screenshot shows a GUI window titled "ANALOG OUTPUT / POSITION" with a sub-header "Communication - Data Output Read". It features three radio buttons for communication mode: ADC (selected), SPI, and SENT. Below are two columns for "Chip 1" and "Chip 2". The "VCC [%]" row shows values 21.5 and 13.6, with "AUTO READ" and "STOP at the END" buttons. The "pos_out [dP]" row shows values 14143 and 8945, with a "READ OUT" button.

If the AUTO READ button is pushed, the GUI gets the data from the chips and shows it in the graph. Pushed buttons give green text. If a button is clicked again, AUTO READ stops. The same applies for the STOP at the END button.

When SPI communication is set, additional check box direct adc mode appears right above the STOP at the END

button. This mode is intended to use with 2 coils sensors (sine and cosine) and direct adc readout from the chip. When checked, readout is changed from Vcc [%] and pos_out [dP] to registers rec32 [15:0] and rec21 [15:0]. For proper readout, it is necessary to program bit 4 in register 8 (direct_adc) in the chip EEPROM memory.

The screenshot shows the same GUI window but with SPI selected. A "direct adc mode" checkbox is checked. The "rec32[15:0]" row shows values 60223 and 65125, with "AUTO READ" and "STOP at the END" buttons. The "rec21[15:0]" row shows values 9158 and 9745, with a "READ OUT" button. The "ATAN2 [rad]" row shows values -0.52569 and -0.04215, with a dropdown menu set to "rec32/rec21".

The Position is then calculated with function ATAN2 [rad] and the user can select if it is calculated as rec32/rec21 or rec21/rec32.

EVALUATION KIT: VOLTAGES, LED INDICATION AND TEMPERATURE

The screenshot shows a GUI window titled "EVALUATION KIT: VOLTAGES, LED INDICATION AND TEMPERATURE". It has four input fields: "VIN [V]" (11.0), "VCC [V]" (5.0), "VIO [V]" (3.3), and "Temp [°C]" (24.2). To the right are five checkboxes: LED_ANALOG (checked), LED_SPI (checked), LED_SENT (unchecked), LED_SM (unchecked), and LED_FAULT (unchecked). A "Read Volt and LED" button is at the bottom right.

There are four readable values from the Evaluation Kit:


- **VIN [V]** – input voltage
- **VCC [V]** – power supply for the chip
- **VIO [V]** – 5 V or 3V3 regulator voltage
- **Temp [°C]** – temperature measured on the Evaluation Kit

EVBUM2863/D

There are also LED_xx indicators. They indicate selected interface, Service mode entered (SM) and Faults. Those indicators present the same state as the physical LEDs on the

Evaluation Kit. After clicking Read Volt and LED, all data is read and presented.

GRAPH

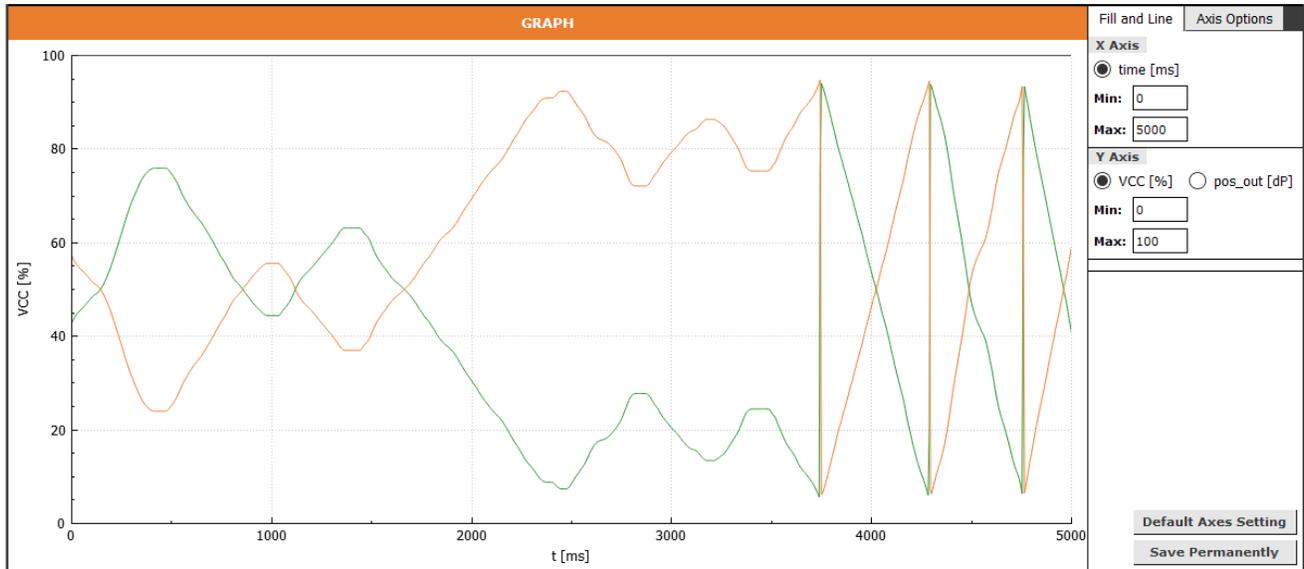

In the GRAPH part it is possible to see the data from chips which are read when AUTO READ button is pressed. On the right there is a panel for graphical settings. It is possible to set:

- **X axis** – set min and max time value
- **Y axis** – set min and max value and it is possible to choose what is showed in the graph – VCC% or Position in dP (datapoints)
- **Axis option** – set color and line style for each curve

It is possible to save these settings permanently by clicking the Save Permanently button. If you want to set the default values, click Default Axes Setting or delete the file **format.cnf** in GUI folder.

Service Mode Tab:

In Service mode tab there are four main parts:

- ENTER/EXIT SERVICE MODE
- CONFIGURATION
- POSITION
- SENT

There are also two buttons for Write all registers or Read all registers.

- WRITE ALL REGs button is disabled if NCV77320 is in Operation mode. It is enabled after entering Service mode only
- READ ALL REGs button is enabled all the time, but for successful readout in operational mode it is necessary to enable SPI in EEPROM (spi_ena = 1). Without SPI enabled, all values are read as 0xFFFF

The screenshot shows the 'ENTER/EXIT SERVICE MODE' interface. At the top, there are tabs for 'Operation mode', 'Service mode', 'REGs [7:11] CAL', 'REGs [12:43] POS', 'REGs [44:63] SENT', 'Runtime memory [0:63]', and 'Fail Flags'. The 'Service mode' tab is active.

Service Mode - Choose CHIP
 CHIP 1 CHIP 2

Service Mode - Communication
 OUT pin SPI

Buttons: ENTER SM, EXIT SM

CONFIGURATION

- WatchDog config: Disabled
- SPI Enable:
- SPI Interrupt: Level sensitive
- Position calculation: Internally
- Output pin config: Analog
- SENT pause pulse:
- SENT serial message:
- SENT ch2 content: Temperature

POSITION

Graph showing pos_out[15:0] vs pos_adj[15:0]. The curve starts at approximately 62000 for pos_adj = 0 and decreases to approximately 5000 for pos_adj = 60000.

PWL correction table

	pos_adj (X)		pos_out (Y)	
0	0	0%	62258	95%
1	13107	20%	62258	95%
2	52428	80%	3276	5%
3	65535	100%	3276	5%
4	0	0%	0	0%
5	0	0%	0	0%
6	0	0%	0	0%
7	0	0%	0	0%
8	0	0%	0	0%
9	0	0%	0	0%
10	0	0%	0	0%
11	0	0%	0	0%
12	0	0%	0	0%
13	0	0%	0	0%
14	65535	100%	0	0%

SENT

Message ID	Data
0x03	123
0x05	1234
0x06	1
0x87	33
0xf2	1
0xf4	3
0xf6	5
0xf0	0
0x10	0
0x40	0
0x50	0

Buttons: WRITE ALL REGs, READ ALL REGs

Parts CONFIGURATION, POSITION and SENT are disabled until the Service mode is entered. After entering Service mode, they are enabled for write.

All registers accessed in this Service mode tab can be approached via the other tabs with the detailed memory map (REGs [7:11] CAL, REGs [12:43] POS, REGs [44:63] SENT, Runtime memory [0:63]).

This tab displays the data in more user-friendly format, but it is not possible to set all the registers there. Calibration data, position zero offset, diagnostics disable and lock bit for calibration part of the EEPROM needs to be set in REGs [7:11] CAL.

EVBUM2863/D

ENTER/EXIT SERVICE MODE

Operation mode	Service mode	REGs [7:11] CAL	REGs [12:43] POS	REGs [44:63] SENT	Runtime memory [0:63]	Fail Flags
ENTER/EXIT SERVICE MODE						
Service Mode - Choose CHIP						
<input checked="" type="radio"/> CHIP 1 <input type="radio"/> CHIP 2						
Service Mode - Communication						
<input checked="" type="radio"/> OUT pin <input type="radio"/> SPI						
<input type="button" value="ENTER SM"/>						
<input type="button" value="EXIT SM"/>						

This part is used to enter and exit the Service mode. It is necessary to select which chip and which interface should be used to enter the Service mode. After clicking on the ENTER SM, the chip which is chosen is brought into Service mode.

If the chip is in Service mode, all Write buttons are enabled so almost all registers are possible to program. For more information about setting registers see below – [Registers](#).

EXIT SM leaves the Service mode and brings the chip to the Operation mode.

CONFIGURATION


CONFIGURATION	
WatchDog config:	Disabled
SPI Enable:	<input checked="" type="checkbox"/>
SPI Interrupt:	Edge sensitive
Position calculation:	Internally
Output pin config:	Analog
SENT pause pulse:	<input checked="" type="checkbox"/>
SENT serial message:	<input checked="" type="checkbox"/>
SENT ch2 content:	Temperature

This sets the basic parameters in registers [7:11] CAL. It is possible to enable or configure:

- WatchDog configuration
 - ◆ Disabled
 - ◆ 5 ms initial watchdog window
 - ◆ 20 ms initial watchdog window
 - ◆ 200 ms initial watchdog window
- SPI
 - ◆ Enable/disable
 - ◆ SPI interrupt level or edge sensitive
- Position calculation
 - ◆ Internally or externally (just RAW ADC data are available through SPI)
- Output pin configuration
 - ◆ ANALOG
 - ◆ SENT
- SENT
 - ◆ Pause pulse enable
 - ◆ Serial messages enable
 - ◆ Fast channel 2 content – temperature or secure frame counter (H.1 or H.4 formats)

For more settings it is necessary to go to the [REGs \[7:11\] CAL](#) tab.

POSITION

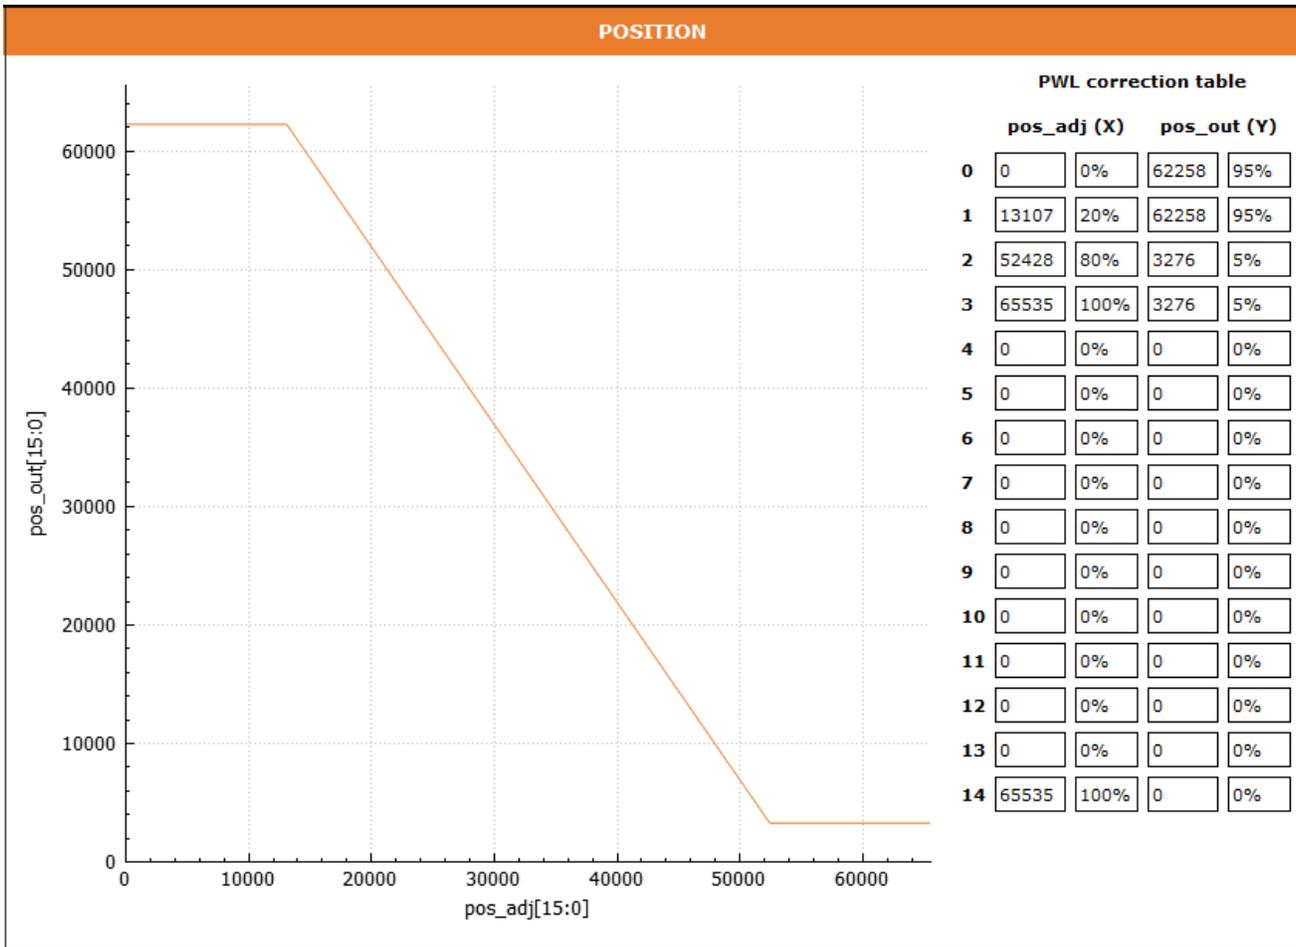

In this part it is possible to set the PWL correction table. On the left there is a graph which shows the programmed output curve. On the right it is possible to set pos_adj and pos_out in dP or in percentage.

Pos_adj on the first position (zero) and last position (fourteen) is not possible to set. First position is always set to zero and the last is always 65535. Last position is used only if all positions before are set. New pos_adj X has to be always higher than previous and the last point used must be 65535 to close the table.

With the PWL table it is possible to program a desired transfer function, clamp the position output for certain minimum and maximum levels and remaining PWL points can be used for further linearization of the transfer function during the calibration process.

To check detailed memory content with calculated CRC values it is necessary to go to the [REGs \[12:43\] POS](#) tab.

For more information please refer to the datasheet.

SENT

Here it is possible to configure the SENT slow channel messages. First it is necessary to program the Message ID. It is in Hex format. Then it is possible to program the Data in the range 0 to 4095.

In the SENT settings part of the Service mode tab it is possible to set easily the Message ID and Data. Message ID is folded from two programmable registers. The first hex place is sent_idpgx and the second is sent_idxx. It is the

reason why there is always the same hex number on the first nibble of Message ID for four messages. For further explanation please check the datasheet – Table 15: Enhanced Serial Message Sequence.

The user can read this data in the SENT window. It is shown by clicking the Menu Bar → Window → SENT messages. If SENT communication is turned off, the GUI will ask if the user wants to turn it on.

SENT	
Message ID	Data
0x03	123
0x05	1234
0x06	1
0x87	33
0xf2	1
0xf4	3
0xf6	5
0xf0	0
0x10	0
0x40	0
0x50	0

SENT

SENT

Fast Channel

chip 1 chip 2

sent_ch2_cnt:

pos_out[dP]:

counter bits/temp [dP]:

AutoRead:

Read Fast Message

Slow Channel

chip 1 chip 2

Buffer:

AutoRead:

Read Slow Message

Time	Chip	Message ID (hex description)	Data (hex dec)
12:44:44	chip1	0x01 Failure flags	0x0000 0
12:44:44	chip2	0x01 Failure flags	0x0000 0
12:44:44	chip1	0x23 Temperature code	0x033f 831
12:44:44	chip2	0x85 V_REC amplitude	0x0391 913
12:44:44	chip1	0x00 user data	0x0000 0
12:44:44	chip2	0x50 user data	0x0000 0
12:44:44	chip1	0x00 user data	0x0000 0
12:44:44	chip2	0x50 user data	0x0000 0
12:44:44	chip1	0x00 user data	0x0000 0
12:44:44	chip2	0x50 user data	0x0000 0
12:44:44	chip1	0x00 user data	0x0000 0
12:44:44	chip2	0x87 SENT device ID	0x0021 33
12:44:44	chip1	0x01 Failure flags	0x0000 0

It reads two channels: fast channel and slow channel. Clicking on Read Fast Message button will read the data and shows it in the line edits. For auto read there is a checkbox AutoRead. When checked, the data is read automatically.

For slow channel there is also the Read Slow Message button for single message read, for auto read it is necessary to check the AutoRead check box. Data is written in the table at the bottom of this window. For transmitting and reading SENT slow channel messages, it is necessary to enable this option in registers – ADDRESS [8], bit 14 [sent_ser_msg].

sent_ch2_cnt (ADDRESS [8], bit [15]) sets the SENT format. The first channel always contains the position but the second channel can be configured as either temperature or secure counter with first nibble inversion.

Detailed memory map is in the [REGs \[44:63\] SENT](#) tab.

Registers:

When SPI is enabled, it is possible to read all registers from the chips even in operation mode. If SPI is disabled it reads 0xFFFF data on all addresses.


On the top the user can choose between CHIP1 / CHIP2 and on the bottom there are two buttons. One for reading the registers and the other for writing the registers. Every tab for specific registers has its own button to read and write registers on that tab. The Write button is disabled in the Operation mode and is enabled in the Service mode.

CRC values are not possible to change. Correct values are automatically calculated by the software in the GUI according to the EEPROM content.

If Lock bit is checked, the GUI will notify the user before writing the registers because after writing the lock bit, it is not possible to reprogram the values in EEPROM anymore.

REGs [7:11] CAL

This tab shows registers at the addresses [7:11]; calibration parameters

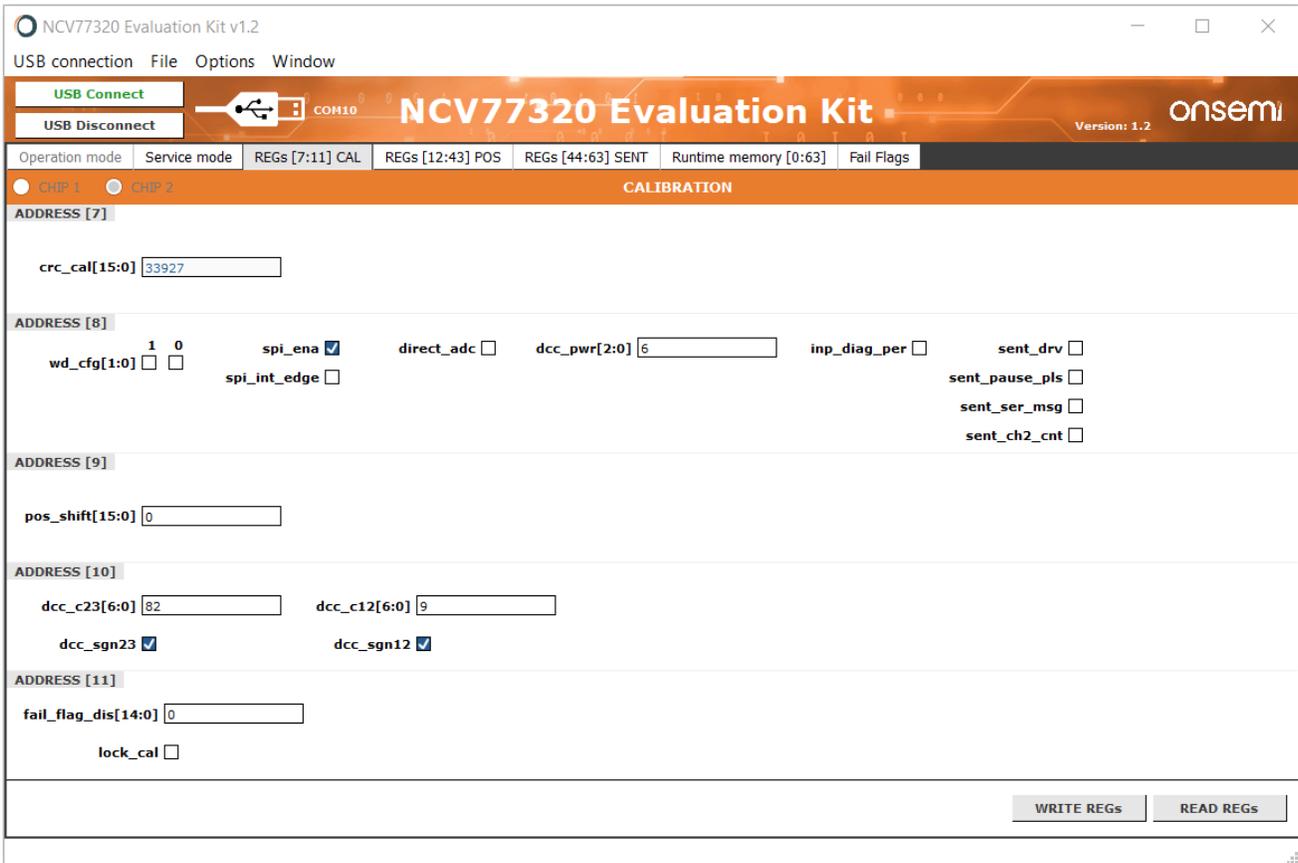

EVBUM2863/D

REGs [12:43] POS

This tab shows registers at the addresses [12:43]; PWL correction table

NCV77320 Evaluation Kit v1.2

USB connection File Options Window

USB Connect USB Disconnect COM10 NCV77320 Evaluation Kit Version: 1.2 onsemi

Operation mode Service mode REGs [7:11] CAL REGs [12:43] POS REGs [44:63] SENT Runtime memory [0:63] Fail Flags

CHIP 1 CHIP 2 POSITION

ADDRESS	Register Name	Value
ADDRESS [12]	crc_pos1[15:0]	29696
ADDRESS [13]	pwl_y0[15:0]	3296
ADDRESS [14]	pwl_x1[15:0]	65535
ADDRESS [15]	pwl_y1[15:0]	62240
ADDRESS [16]	pwl_x2[15:0]	0
ADDRESS [17]	pwl_y2[15:0]	0
ADDRESS [18]	pwl_x3[15:0]	0

WRITE REGs READ REGs

REGs [44:63] SENT

This tab shows registers at the addresses [44:63]; the SENT slow channel messages settings.

NCV77320 Evaluation Kit v1.2

USB connection File Options Window

USB Connect USB Disconnect COM10 NCV77320 Evaluation Kit Version: 1.2 onsemi

Operation mode Service mode REGs [7:11] CAL REGs [12:43] POS REGs [44:63] SENT Runtime memory [0:63] Fail Flags

CHIP 1 CHIP 2 SENT

ADDRESS	Register Name	Value
ADDRESS [44]	sent_sensor_type[11:0]	123
	sent_idpg1[3:0]	15
ADDRESS [45]	sent_manufacturer_code[11:0]	1234
	sent_idpg2[3:0]	1
ADDRESS [46]	sent_protocol_rev[11:0]	1
	sent_idpg3[3:0]	4
ADDRESS [47]	sent_dev_id[11:0]	33
	sent_idpg4[3:0]	5
ADDRESS [48]	sent_data_11[11:0]	1
	sent_id11[3:0]	2
ADDRESS [49]	sent_data_12[11:0]	3
	sent_id12[3:0]	4
ADDRESS [50]	sent_data_13[11:0]	5
	sent_id13[3:0]	6

WRITE REGs READ REGs

EVBUM2863/D

Runtime Memory [0:63]

This tab shows runtime memory registers address [0:63]. Most of these registers are read only. In this tab it is possible to read the position output, Vrec amplitude, excitation coil amplitude and more. It is possible to set dcc_cal for getting different parameters at the same address (RT_ADDRESS 2

and 3) for the calibration purposes. For more information, please refer to the datasheet. In service mode, the Verify and read command is available. It compares the configuration memory with the EEPROM. If successful, bit ee_verify is set after automatic readout.

NCV77320 Evaluation Kit v1.2

USB connection File Options Window

USB Connect USB Disconnect COM10 NCV77320 Evaluation Kit onsemi Version: 1.2

Operation mode Service mode REGS [7:11] CAL REGS [12:43] POS REGS [44:63] SENT Runtime memory [0:63] Fail Flags

CHIP 1 CHIP 2 Runtime memory

RT ADDRESS [0] pos_out[15:0] 49178

RT ADDRESS [1] vrec_amp[15:0] 20 = 0.00 mV

RT ADDRESS [2] rec32_amp[15:0] 65493 = -0.01 mV

RT ADDRESS [3] rec21_amp[15:0] 65475 = -0.01 mV

RT ADDRESS [4] ex_amp[13:0] 16383 = 1560.1 mV

RT ADDRESS [5] ex_scale[2:0] 5

RT ADDRESS [6] temp_code[11:0] 798 = 26.6 °C

RT ADDRESS [7] vout_amp[10:0] 51

RT ADDRESS [8] fail_flags[15:0] 224

RT ADDRESS [9] dcc_cal[1:0] 1 0 gain_frz osc_frz

RT ADDRESS [10] agc_gain[4:0] 23 adc_off[6:0] 58

RT ADDRESS [11] preset_curr[7:0] 96

RT ADDRESS [12] ee_verify Verify and read


RT ADDRESS [63]

WRITE REGs READ REGs

Fail Flags:


In the Fail flags tab there are all fail flags shown for both chips. Outside the service mode, it is possible to read failure flags only via SPI. When the SPI is disabled, all fail flags will

be checked. For the chip in the Service mode, failure flags can be read out via both interfaces (OUT interface or SPI).

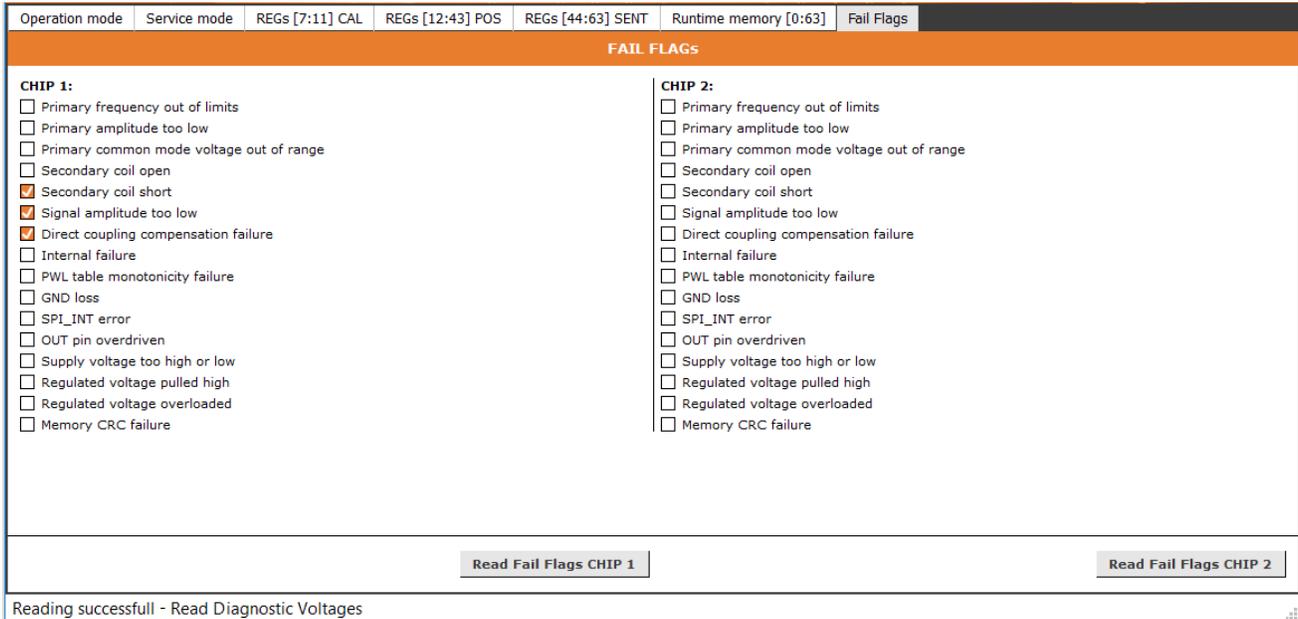


WatchDog:

The user can set the acceptance window start time [ms] (early refresh), stop time [ms] (late refresh) and the period [ms] for each chip separately. For successful watchdog refresh, the period must be between start time and stop time.

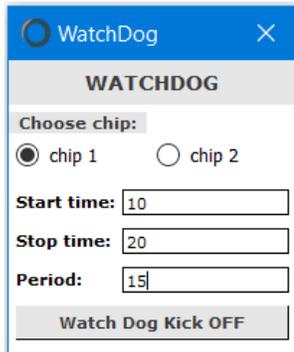

Help

In Menu Bar → Window → Help there is window with some help for objects in the GUI

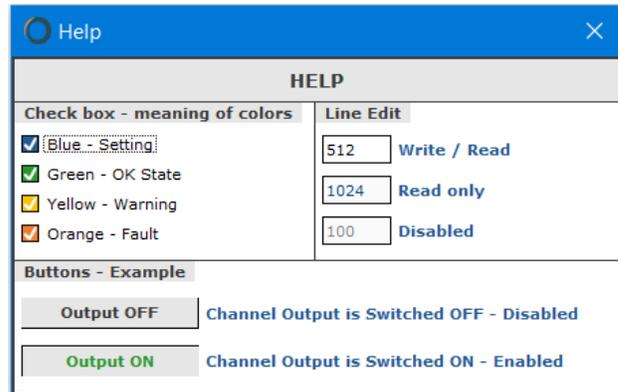

Calibration:

Calibration window can be opened only if chip 1 or chip 2 is in service mode. It can perform automatic dcc calibration without the rotor. For further details, please refer to the application note AND90226. The user can use buttons Read from chip, Calculate and then Write to chip or simply click Automatic dcc calibration without rotor and all steps are done automatically.

For this type of the calibration, it is necessary, that no previous calibration coefficients are programmed in the EEPROM memory. If calibration registers are not all programmed to 0, the calculator should display a warning with an offer to clear the calibration registers, but this means the previous calibration coefficients will be lost.

Direct ADC Sampling:

This window can be found in Menu Bar → Window → Direct ADC sampling. It is dedicated for the 2 coils (sine/cosine) systems where the NCV77320 is used for input sample acquisition and the position is calculated externally. For more information, please refer to the datasheet of the NCV77320. Bits direct_adc (ADDRESS [8], bit [4]) and spi_ena (ADDRESS [8], bit [2]) must be set for proper function.

The user can set the sampling period and the number of samples to be acquired. If the user wants to save the sampled data, before starting the measurement by pressing the Auto read button, save to .csv file must be checked and the file name and the file path needs to be selected in the popup window.


Evaluation Kit Hardware:

The Evaluation kit is built around the PIC32 micro controller. The NCV77320 sensors can be connected to the Evaluation kit by a 20 pin HARWIN connector or by a 6 pin connector, but only one of those two can be used at the time. The 6 pin connector contains only the power supply, GND and output (analog or SENT), while the HARWIN connector is equipped with all interfaces including SPI and supply lines for a dual channel sensor.

Several jumpers are installed to enable the user to measure currents on the piggyback with HARWIN connector

(W_VIO, W_VDD5V), set VIO voltage (3.3 V or 5 V) or to disconnect the microcontroller supervisory circuit (W1 and W2). Ground bars and test points are installed for simple connection of measurement probes.

The picture below shows the board layout of the Evaluation kit motherboard. Major functional blocks are marked in green with the description below.

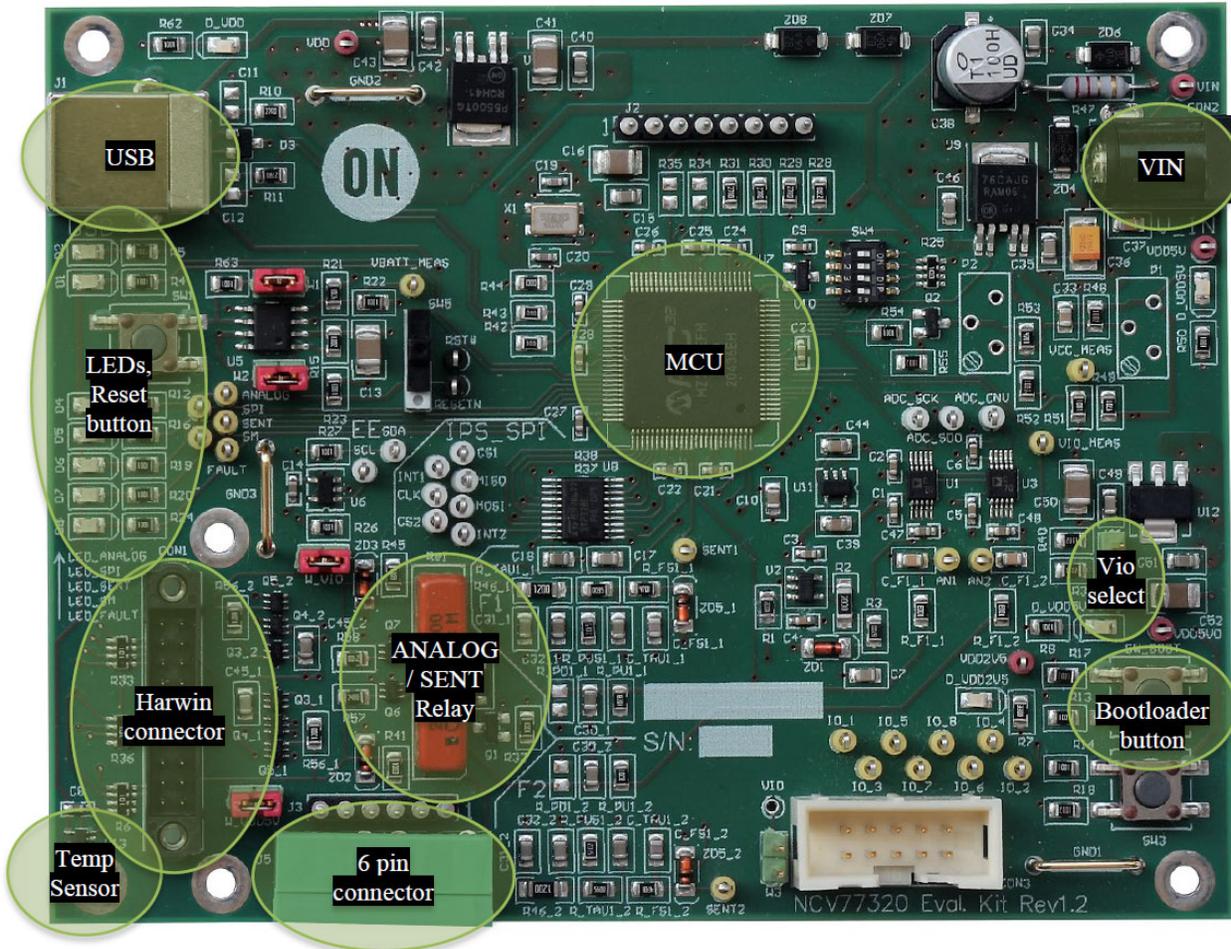

- **VIN** – input voltage connector 12 V
- **USB** – USB B connector for connection with the PC
- **MCU** – microcontroller PIC32MZ EF family
- **LEDs, Reset button** – LED indicators for communication, selected output interface, Service mode entered and Faults. Reset button for resetting the board and the microcontroller
- **HARWIN connector** – connection of the piggyback sensor board with two NCV77320’s. SPI, ANALOG and SENT interfaces are possible to use
- **6 pin connector** – sensor connector with two NCV77320, only VCC, GND and OUT pin for each chip is possible
- **Temp sensor** – temperature sensor for measuring temperature close to the piggyback board
- **ANALOG / SENT Relay** – for switching between ANALOG and SENT input filters
- **Vio select** – 3.3 or 5 V selectable by the jumper position
- **Bootloader button** – for entering the bootloader mode for updating the firmware in microcontroller

Connector PIN layout

PJ5: 6 PIN IMO PRECISION CONTROLS Connector:
use 20.1550M/6-E type to interface
(Farnell number: 2575219)

1	VCC1
2	OUT1
3	GND1
4	GND2
5	OUT2
6	VCC2

CON1: 20 pole HARWIN Connector:
use M80-4002042 type to interface
(Farnell number: 1144527)

1	SPI INT2
2	SPI CS2
3	SPI_MOSI2
4	SPI_CLK2
5	SPI_MISO2
6	SPI_INT1
7	SPI_CS1
8	SPI_MOSI1
9	SPI_CLK1
10	SPI_MISO1
11	GND2
12	OUT2
13	VCC2
14	VIO2
15	NC
16	NC
17	VIO1
18	VCC1
19	OUT1
20	GND1

Schematics and further documentation


For the schematics of the Evaluation kit we refer to the file
 NCV77320_Schematics.pdf

For the latest datasheet version of the NCV77320, please
 contact your local sales representative.

PIC32 Bootloader:


Clicking Menu Bar → Window → PIC32 Bootloader Application V1.2 should launch the bootloader application. If not, bootloader application can be found in the installation folder. It can be used to download new firmware to the

microcontroller. Normally updates are delivered by onsemi, but the Evaluation board can be customized by the customer for specific use.

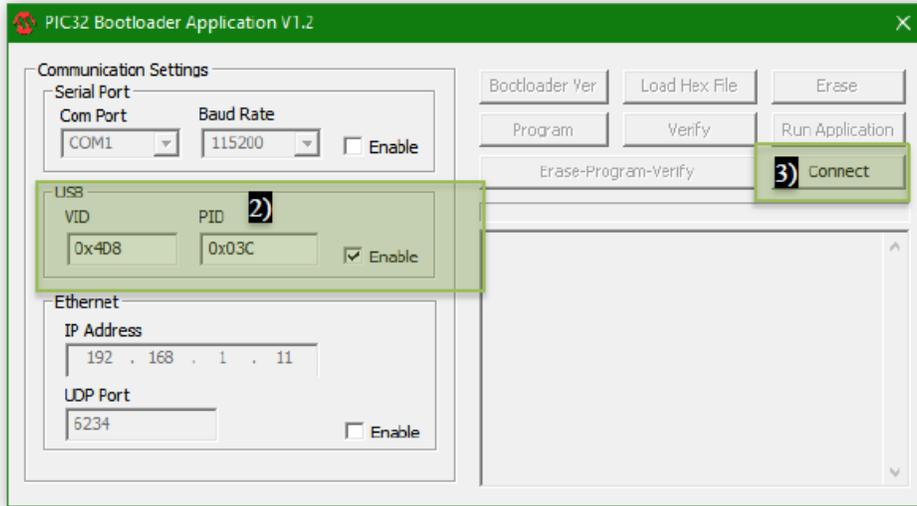


1. On the Evaluation kit motherboard it is necessary to push button SW_BOOT and hold it, then push and hold button SW1 (Reset button). When LED_FAULT (D8) is turned on and LED_SM (D7) starts blinking, the board is prepared for the firmware update. To be able to stay in bootloader mode, jumper W1 must be disconnected. If unable to perform reset, make sure jumper W2 is connected and SW5 is in upper position.

2. In PIC32 bootloader application it is necessary to choose USB → enable.
3. Click the Connect button. If connection is not successful, reconnect the USB cable or reset the board again into bootloader mode.

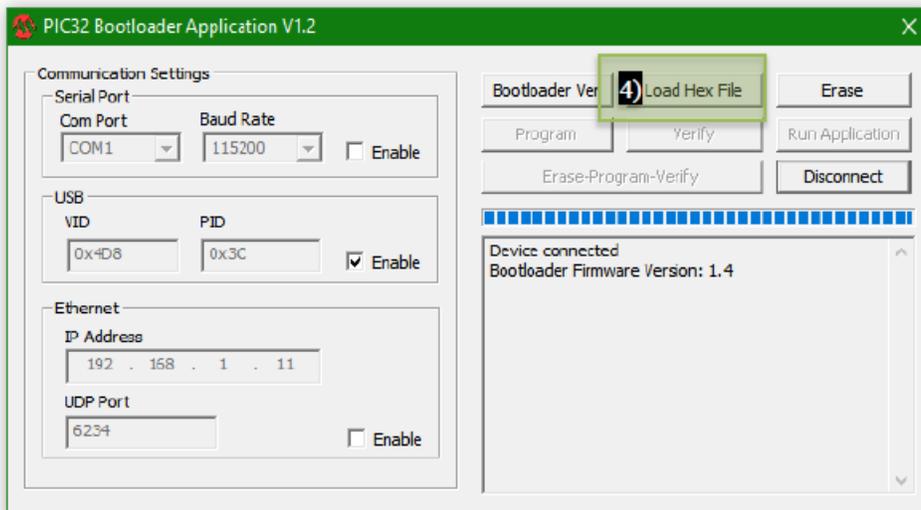


4. Click the “Load Hex File” button

5. Choose the Hex file

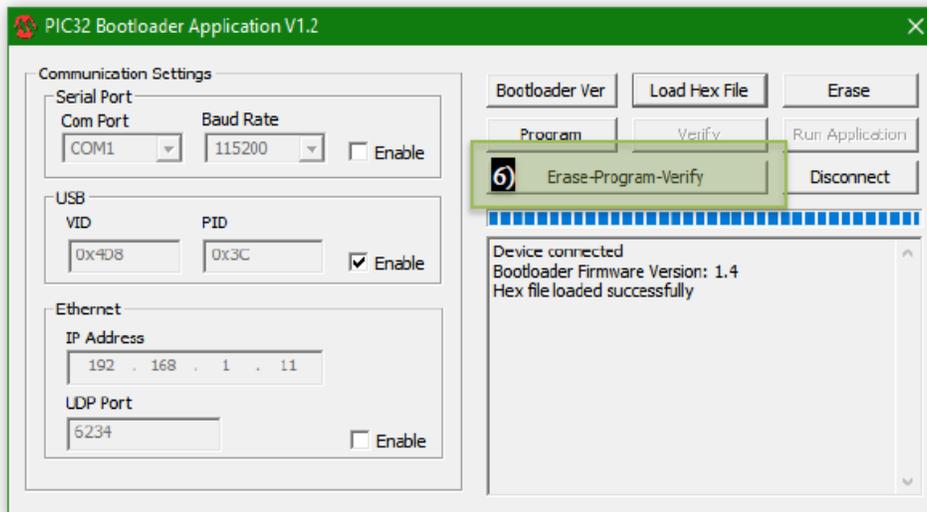

6. Click to “Erase–Program–Verify” button

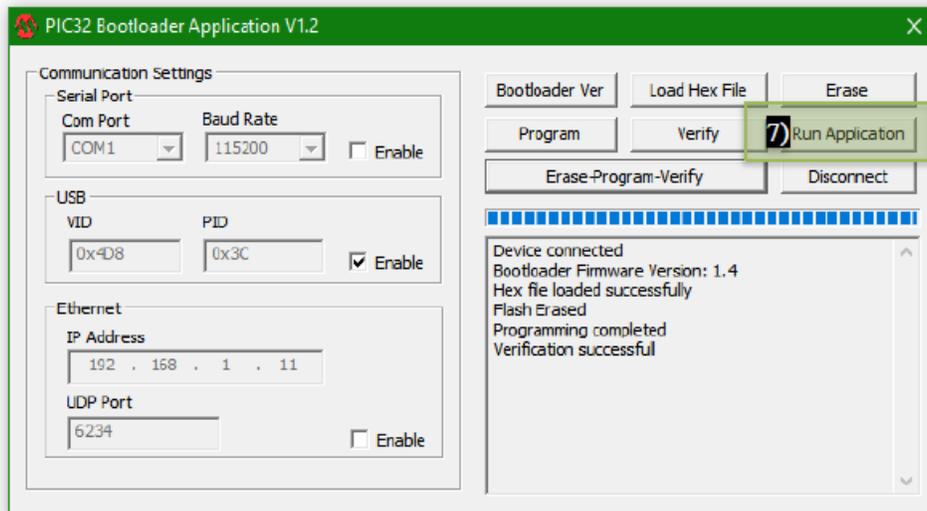

7. Click to “Run Application” button

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.

onsemi reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

onsemi products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

onsemi does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit www.onsemi.com.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales